

CAD-CUT® PREMIUM PLUS



| | | | | | | | |
|--|--|---|--|---|--|---|---|
|  | 001 white |  | 005 cream ca. Pant. 4655c |  | 100 lemon ca. Pant. 7405c |  | 110 yellow ca. Pant. 012c |
|  | 106 sunflower yellow ca. Pant. 137c |  | 185 light orange ca. Pant. 1495c |  | 180 orange ca. Pant. 021c |  | 210 signal red ca. Pant. 185c |
|  | 200 red ca. Pant. 186c |  | 270 burgundy ca. Pant. 188c |  | 255 pastel pink ca. Pant. 2036c |  | 252 pink ca. Pant. 507c |
|  | 250 fuchsia ca. Pant. 2425c |  | 285 pastel purple ca. Pant. 2071c |  | 280 purple ca. Pant. 2096c |  | 321 pastel blue ca. Pant. 538c |
|  | 320 light blue ca. Pant. 298c |  | 300 royal blue ca. Pant. 286c |  | 350 navy ca. Pant. 532c |  | 380 turquoise ca. Pant. 7717c |
|  | 420 pastel green ca. Pant. 358c |  | 421 apple green ca. Pant. 368c |  | 422 light green ca. Pant. 362c |  | 400 green ca. Pant. 7727c |
|  | 410 dark green ca. Pant. 560c |  | 430 olive ca. Pant. 7763c |  | 550 brown ca. Pant. 7616c |  | 730 grey ca. Pant. 7543c |
|  | 780 dark grey ca. Pant. 419c |  | 700 black |  | 815 silver ca. Pant. 877c |  | 115 gold ca. Pant. 871c |
|  | 101 neon yellow |  | 181 neon orange |  | 241 neon pink |  | 301 neon blue |
|  | 401 neon green | | | | | | |

CAD-CUT® PREMIUM PLUS



POLYURETHANE, THIN, STRETCHABLE, ELASTIC FLEX MATERIAL WITH A SLIGHTLY ADHESIVE CARRIER.

Premium Plus has a satin finish, and is recommended for easy cutting and weeding. It is suitable for several print proofs.

This film is innovative, designed for superior stretch on performance fabrics, and most heat sensitive textiles.

Due to its durability it performs very well when it is applied to a huge range of fabrics at low temperatures, with a very short application time.

It has a frosted pressure sensitive carrier which enables easy cutting and weeding. It is ideal for detailed work and designs featuring multiple colours.

The material has a soft matte finish and is available in university and fashionable colours. Premium Plus is the obvious choice for sports/ performance wear and fashion items.



AVAILABLE IN

50 cm x 25 m rolls

RECOMMENDED FABRICS

- 100% cotton
- 100% polyester*
- Polyester-cotton-blends
- Lycra® / spandex blends
- Satin
- Polyester mesh

* Test before application!

CUTTING NOTES

You should always test cut prior to any production run. Remember cutter settings will need to be adjusted as the blade ages. For optimal cutting and weeding, maintain a line thickness of at least 2,0 mm for lettering and logos.

APPLICATION INSTRUCTIONS

- Temperature: 130°C / 150°C
- Time: 10 sec. / 5 sec.
- Pressure: Medium
- (#4-6 on Hotronix®)
- Peel: Hot

MULTI-COLOUR DESIGNS

Apply background for 3-5 seconds, peel carrier cold. Repeat for additional colours. Finish with final application of 18-20 seconds. Peel cold.

ACCESSORIES RECOMMENDED

- Grip Cover Sheet
- Cover Sheet - Non-Sticky
- EZ Weeder®

CARE INSTRUCTIONS

Machine wash up to 60° C using mild detergent. Do not use bleach. Dry at normal dryer settings on household machines. Do not dry-clean. Can be directly ironed.


STORAGE

Store in cool, dry area. Avoid direct heat, sunlight and humidity.

DETAILS



KEY

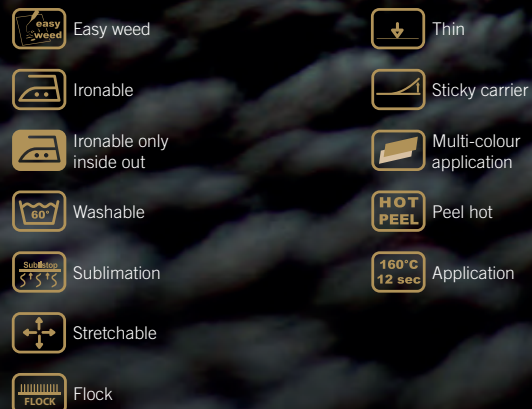

Allmost all materials can be combined with each other and are suited for a variety of fabrics. For further information please consult the product details online.

STAHL'S
EUROPE • AFRICA • MID EAST